

STEELCOAT 100™ SYSTEM



A petrolatum tape system for the protection of above ground pipe and steelwork

The Steelcoat 100™ System comprises an adhesive petrolatum primer (Denso Hi-Tack™ Primer) and a very adhesive petrolatum tape (Denso Hi-Tack™ Tape). For damp or low temperature pipework, Denso Paste S105™ replaces the Denso Hi-Tack Primer.

For pitted or badly rusted structural steel and pipework applications, Denso Hi-Tack Primer and Tape are utilised in conjunction with a petrolatum mastic for sealing voids and fittings (Denso Profiling Mastic™).

Where additional insulation is required, Densofil™ is utilised to seal flanges and voids prior to tape wrapping.

FEATURES

- Cold applied
- Surface tolerant
- Useful for damp/low temperature surfaces
- Useful for pitted or badly rusted surfaces
- Can be applied by hand or wrapping machine

COMPONENTS

For badly pitted/rusted structural steel and pipework:

Denso Hi-Tack™ Primer

Denso Hi-Tack™ Tape

Denso Profiling Mastic™

For sealing voids and fittings.

For damp/low temperature pipework:

Denso Paste S105™


Denso Hi-Tack™ Tape

Densofil™

For sealing/insulating flanges and voids.

SURFACE PREPARATION

Minimal surface preparation required. Surfaces must be clean and dry. Remove all loose rust, scale and flaking coatings by hand wire brush.

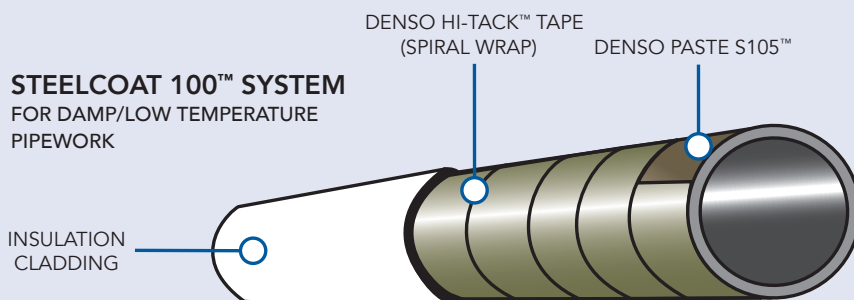

PUB No. 492.05.2020

WINN & COALES (DENSO) LTD

TEL: +44 (0) 208 670 7511
FAX: +44 (0) 208 761 2456
EMAIL: mail@denso.net
WEB: www.denso.net

Winn & Coales (Denso) Ltd
33 - 35 Chapel Road
London SE27 0TR
UNITED KINGDOM



FM 01548 | EMS 583748
ISO 9001:2015 & ISO 14001:2015

