

INSTRUCTIONS FOR USE

NOTE: SELF-ADHESIVE DENSOBAND™ SHOULD ONLY BE APPLIED IN CONJUNCTION WITH HOT LAID ASPHALT.

JOINT SURFACE

The joint surface should be sawn for preference to present an even vertical face throughout its length.

CLEANING (see Fig 1.)

Do not apply Self-Adhesive Densoband to wet, dirt or oil contaminated surfaces.

- Asphalt, concrete, kerbstone surfaces:
Clean with a stiff broom or wire brush to remove all dust, dirt, debris.
- Metal surfaces such as road castings:
Wire brush to remove all loose rust and dirt. Oil may be removed using isopropyl alcohol or similar cleaner.
- All surfaces may be dried using a propane gas torch or similar.

APPLYING SELF-ADHESIVE DENSOBAND (see Figs 2 & 3)

- Cut Self-Adhesive Densoband to the required length.
- Remove the interleaving.
- Apply the cold-adhesive side of the Self-Adhesive Densoband to the joint edge using a trowel or similar tool to aid adhesion. **For surface renovation with asphalt concrete, the Self-Adhesive Densoband shall extend 5mm above the top of the existing surface. For new construction with mastic asphalt, asphalt concrete or metal surfaces, the Self-Adhesive Densoband shall be level with the surface to be laid.**
- Self-Adhesive Densoband shall be butt-jointed at the corners of right angle joints.

Where required due to project specifications or site requirements, a compatible primer is optionally available. When using a primer, apply to the vertical joint face and allow to dry before applying the Self-Adhesive Densoband. A primer is not essential to the performance of this product.




COMPACTION

After laying and levelling the new wearing course asphalt, the first pass of the roller should be along the joint edges, compacting the Self-Adhesive Densoband to form a 'rivet head'.

HEALTH AND SAFETY ADVICE

Self-Adhesive Densoband contains petroleum products which may affect the skin. Users are advised to:

- Ensure adequate ventilation during application.
- Wear gloves, goggles and protective clothing to protect against burns.
- Apply suitable barrier cream before working. In cases of contact with hot compound immerse in cold water.
- Wash thoroughly after use or before work breaks to remove compound from the skin.
- Avoid use of diesel or other solvents for cleaning the skin.
- Change clothing when soiled.

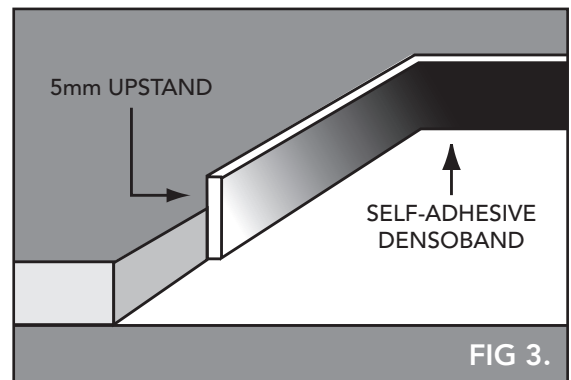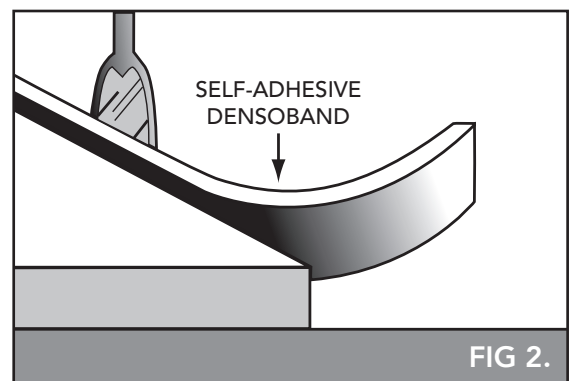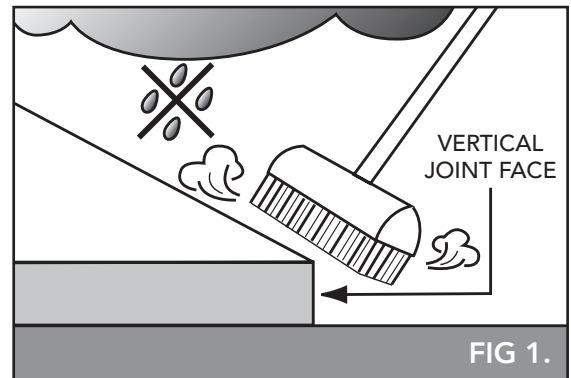

IMPORTANT: Winn & Coales (Denso) Ltd pursue a policy to develop and continually improve all of our products and therefore information given in these instructions for use is intended as a general guide and does not constitute a warranty, specification or risk assessment. Instructions for use are intended to provide sufficiently detailed information to achieve successful installation in normal circumstances. These guidelines may not cover all circumstances; however, our sales personnel are committed to assisting the user in establishing the suitability of the product for its intended purpose and additional specific information, advice and training (including Safety Data Sheets) is available. It is strongly recommended that installation is conducted with due regard to Health and Safety using a safe system of work, including risk assessments and method statements, in accordance with relevant local statutes and regulations. Equipment used for installation must be suitable for the intended use, maintained in a safe condition, inspected for signs of deterioration, and used by competent personnel. Any conflict between these guidelines and the specific project specifications must be resolved by the user before work commences. All rights reserved.